

Two Year Warranty

Shower Head: STAINLESS STEEL

Shower Valve: Instant-action, stay-open, ball valve

Shower Flow Control Valve: 30 GPM

Eye/face Wash: Twin stainless steel heads with dual automatic pressure compensation devices

PVC Yellow Vinyl eye/wash covers with SS chain

Eye/face Wash Control Valves: 7 GPM

Standard: 1 1/4" stainless steel pipe

Supply: 1 1/4" IPS

Electric Cable: Thermon Econotrace parallel resistance electric cable with metallic external braid

Insulation: Polyurethane insulation, encased in PVC jacket

Thermostats: Dual factory set system for control and high limit.

Heating Systems Approvals: Approved for


Class I, Division 2, Groups B, C, & D;

Class II, Division 2, Groups E, F, & G;

Power Supply: 115 v, 60Hz, single phase, AC

Amperage Loading: 0.61 amps, 70 watts

Shipping Weight: approx. 200 lbs.

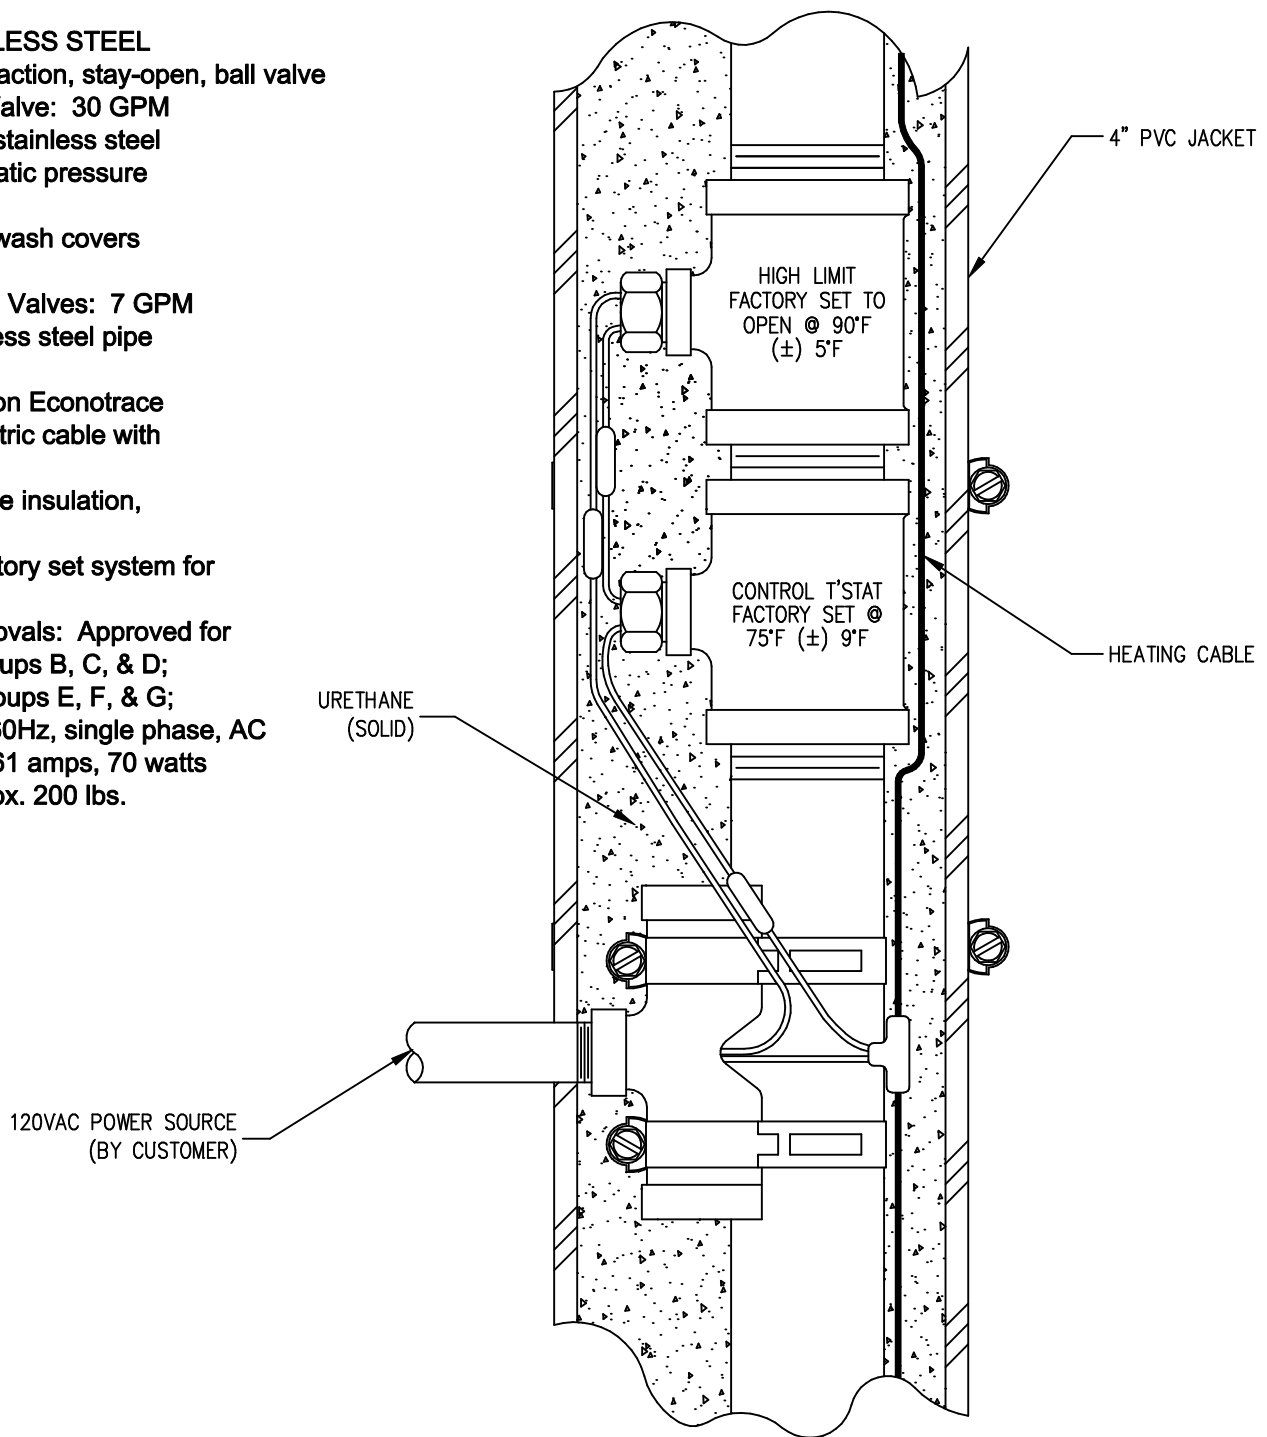

BILL OF MATERIAL (Partial)

DETAIL 'A'

Qty.	Mat'l	Description	Mfg.	No.
1	SS	Floor Flange (9" Dia.)	B-L-S	P-011
2	SS	Flow Control (7 GPM) 3/4"	B-L-S	P-020A
2	SS	Loops W/weep hole 3/32"	B-L-S	P-014
2	SS	Nozzle, Eye-Face Wash	USA	SP20.14
1	SS	Handle, Eye-Face Wash	B-L-S	P-010
2	SS	Cotter Pins 3/32 x 3/4	USA	
4	SS	Socket Head Cap Screws	USA	
2	SS	Acorn Nuts (1/4")	USA	
4	SS	Flat Washers (1/4")	USA	
1	SS	Pull Rod, Shower (D-Ring)	B-L-S	P-013
1	SS	Handle, Shower	B-L-S	P-012
1	SS	Shower Head	USA	8127

Note: B-L-S manufactured products are made in Missouri, U.S.A.